


Electric Cabinet Lock


Model:YE-306

Instructions For Lock Mode Change


- 1. Remove the 4 screws on the bottom.
- 2. Remove base plate and solenoid.
- 3. Tum assembly 180 $^{\circ}\,$ and re-route wires to cut out.
- 4. Install into housing and insert the 4 screws.

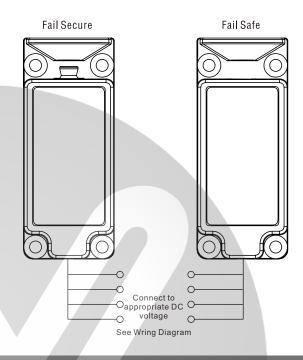

Overall and Mounting Dimensions

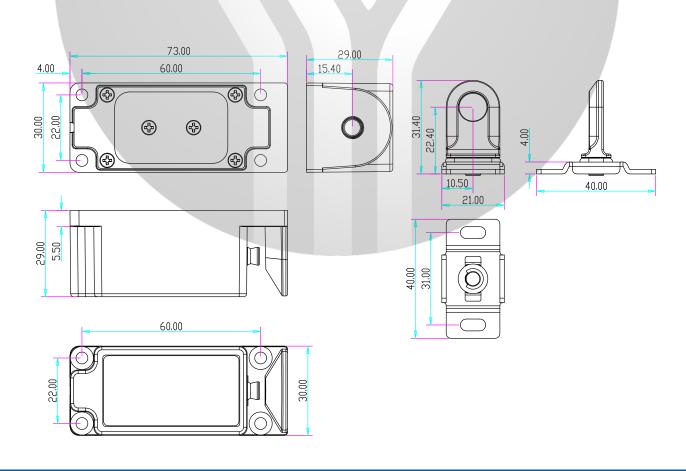


Installation Dimensions

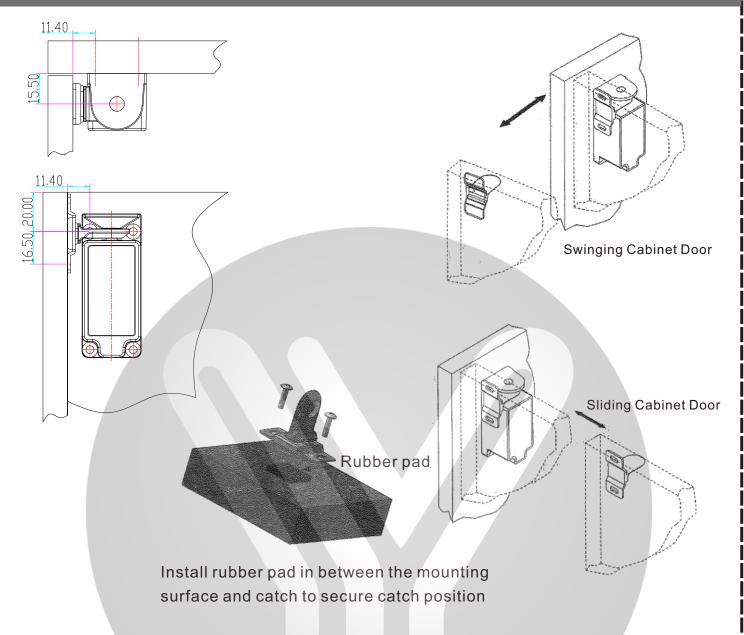


Cabinet Lock Dual Voltage Wiring Diagram

A.12V DC Input 220mA



A.24V DC Input 110mA



www.yli.cn We create security